


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 06/16/12'		LJC 06/16/12'
B	DRAWING UPDATE	JLZ 08/20/18'		
C	DRAWING UPDATE	JLZ 07/10/23'		

NOTES:

- Electrical characteristics:
 - Contact resistance: 20mΩ Max.
 - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
 - Insulation resistance: 1000MΩ Min.
 - Current rating:1.5A.
 - Voltage rating:125V AC rms.
- Environment characteristics:
 - Temperature: 0°C~+70°C.
- Materials
 - Contact material: Copper alloy.
 - Contact plating: Gold plating over nickel.
 - Insulator material: ABS.
- Product number code:

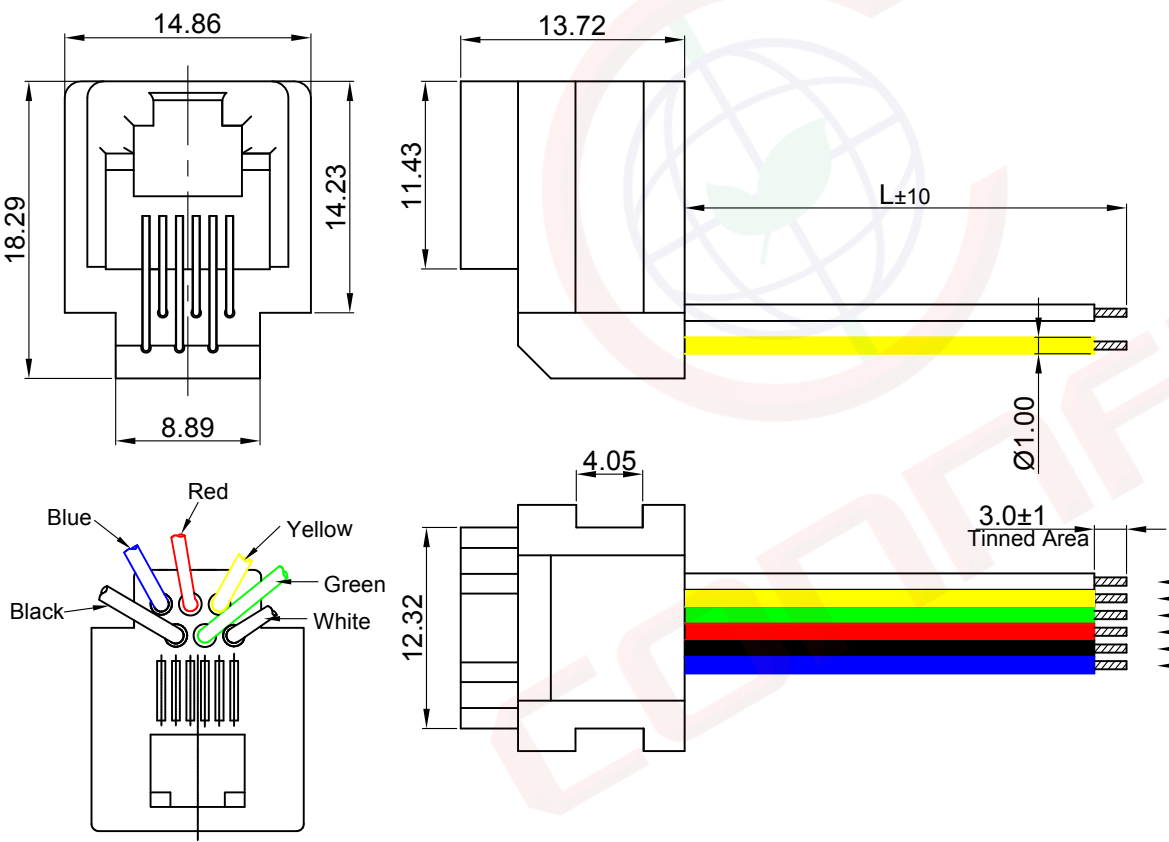

DS1133-04-X X X X X
 Length Dim. L
 100:100mm
 150:150mm
 Housing Color
 B:Black
 A:Gray
 Contact Plating
 0:Gold Flash
 3:3u" Gold
 No.Of Contacts
 6:6P6C
 Connector Type
 S:Socket

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB JACK 6P6C W/ WIRE	
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1133-04 SERIES	
.X	±0.38	.X	±3°					
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD				
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1133-04-XXXXX-C							